


Omni CV

ACOUSTIC PANEL

ZANIBONI®
INDOOR WELLBEING

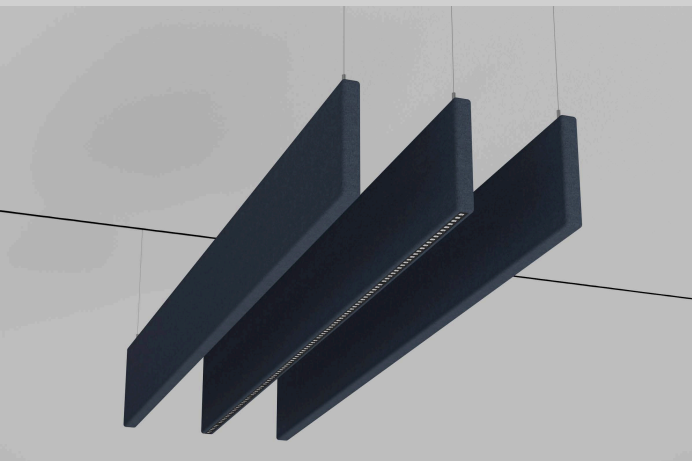

PERFORMANCE

- Track integration for lighting, audio and sensors.
- Premium Dimable Lighting - 13W - 1.785 lm
- 1.39 NRC- Made of 65% Recycled Polyester 2" thick
- Sound Masking Technology
- Bluetooth controls within Zaniboni App

MOUNTING

- Aircraft cable mounted on track

MATERIAL

- Panel: Polyester core wrapped in premium fabric.
- Light: Die-cast aluminum CNC machine finished Minimal thickness.

MULTI-COMBINATIONS

The OMNI Cloud is the first acoustic panel system of its kind to offer both passive and active sound treatment. The acoustic panel provides passive treatment absorbing sound waves thus reducing reverberation and echo, substantially improving speech intelligibility.

The vertical baffles increase the absorption by adding more acoustic surface in the room.

The OMNI Cloud offers endless fabric and texture options providing versatility to any application.

INSTALLATION INSTRUCTIONS

Mounting & electrical connection



[Product Downloads](#)

RELATED ACCESSORIES

- Sound Masking
- Speakers

1 Baffle Length

4' Long	CV-48
8' Long	CV-96

2 Track recessed option

No track	N
Just the track direct	D
Just the track indirect	U
Both direct and indirect track	F

3 Speaker Option (Choose an option just if you have track integrated in your baffle)

Premium Music (2 premium coaxial drivers stereo mode)	P
Background Music (2 Full range loudspeakers stereo mode)	S
Background Music (1 Full range loudspeaker mono mode)	M
Sound Masking (1 emitter)	N
Both (1 full range speaker and 1 sound mask emitter)	B

4 Sensor Option (Choose an option just if you have track integrated in your baffle)

Occupancy Sensor	O
Daylight sensor	D
Both	F

5 Lighting Indirect Option (Choose an option just if you have track integrated in your baffle)

RIGA UGR	O
RIGA OPAL	D
NONE	F

6 Premium Fabric

Refer to the code in the 3rd page --

CV- _ _ _ _ _

eg: CV-96-D-N- _ -F-DR

Omni Baffle dia (60), both indirect and direct light source (specified in the second code below), Sound masking technology 1 speaker, NO sensors, NO indirect lighting, Premium fabric: Dark red brushed flannel by Designtex

1 Model	GEM 2	KO-GEM20
2 Wattage	3 Watts	03
3 Color temperature	2700 kelvin	27
	3000 Kelvin	30
	3500 kelvin	35
	4000 Kelvin	40
	Circadian Light	CL
4 CRI	80	A
	95	B
5 Color temperature	Matte White	WS
	Matte Black	BK
	Custom Color	CC

1 Model	OPAL	L1-RIGMO
	UGR	L1-RIGMU
3 Wattage	9 Watts	03
	13 Watts	13
4 Color temperature	3000 Kelvin	30
	Circadian Light	CL
5 CRI	80	A
	95	B
5 Lens	OPAL (if L1-RIGMO is selected)	OP
	UGR<19 (if L1-RIGMU is selected)	UG
6 Length in inches	22" long	22
7 Voltage	Constant voltage dimmable	v
6 Color	Matte White	WS
	Matte Black	BK

1 Model	TIBI MT	PO-TI
3 Size	12" long	121
	18" long	181
	24" long	124
3 Wattage	3 Watts	03
	7 Watts	07
	9 Watts	09
4 Color temperature	2700 kelvin	27
	3000 Kelvin	30
	3500 kelvin	35
	4000 Kelvin	40
	Circadian Light	CL
5 CRI	80	A
	95	B
6 Beam Angle	10 degrees	1
	24 degrees	2
	36 degrees	3
7 Diffuser	NO diffuser	0
	Clear 1"	C
	Frosted 1"	F
	Champagne 1"	N
8 Fixture color	Matte White	WS
	Matte Black	BK
	Custom Color	CC

KO-GEM20- _ -3- _ _ _

L1- _ _ _ _ _

PO-TI- _ _ _ _ _

Zaniboni Wellbeing - Ph +1(727)213-0410 - Fx +1(727)683 - 9720 - zanibonilighting.com - 101 N Garden Ave Suite 230, Clearwater - FL 33755
The manufacture reserves the right to change or modify the design, dimensions, and photometric information at any time without notice.
The manufacture accepts no liability for consequential damage which is occasioned to the user based on the data provided.

Mounting Options

Drywall-Concrete-Wood Mounting

Allows to add or move panels with modularity


Perfect for any type of ceiling

Aircraft cable 10 ft adjustable

Power Through aircraft cable

Surface mounted mini track

Product #
OMNI MT-C08

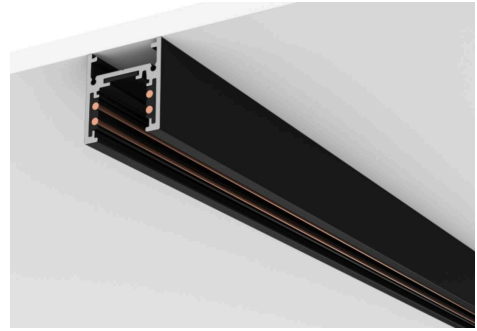

Unistrut pendant system

Perfect for 1 5/8" x 1 5/8" and 1 5/8" x 13/16" channel struts


Aircraft cable 10 ft adjustable

Power Through additional power cable

Pre-assembled and ready to insert

This mounting system doesn't allow to run power through the aircraft cables a power cord from the panel will be included.

Product #
OMNI MT-M08

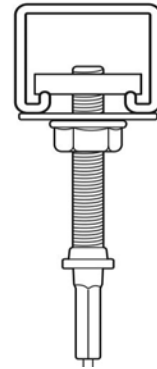

Standard Colors

Brushed Flannel- Designtex



Custom Colors

Whisper- Guildford of Maine





Anchorage- Guildford of Maine

Highly recommended for OMNI CC2: OMNI CC1: OMNI CN



Speaker Technical data



RMS Power	5 W
Max Power	8 W
Impedance	8 Ohm
Frequency Spectrum	150-20,000Hz
SPL	84 dB
Resonance frequency	290 Hz
Voice coil diameter	0.55"
Driver Material	Paper
Driver Diameter	2"
Controls	Bluetooth- WiFi
Amplifier Power	100W

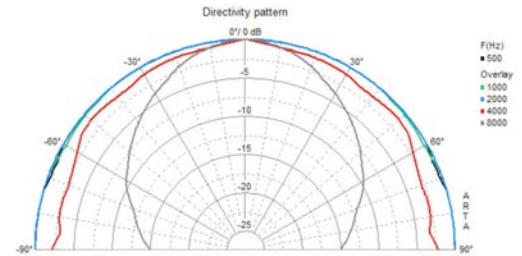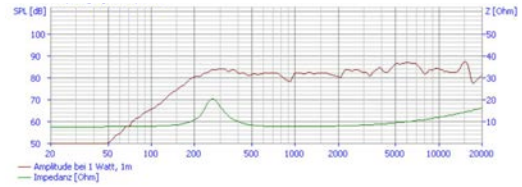

Panel Technical data

Core Material	High density recycled polyester
NRC	1.39
Edges	Squared
Thickness	2 inches
Density	5 pound per cubic foot
Flamability	Class "A" per ASTM E84
Environmental	VOC's free
	Mold and fungal resistant (ASTM C1338)
	Formaldehyde free
	CDPH 1.2 - Indoor Air Gold Certified
	Declare-LBC red list free

bios
Declare.

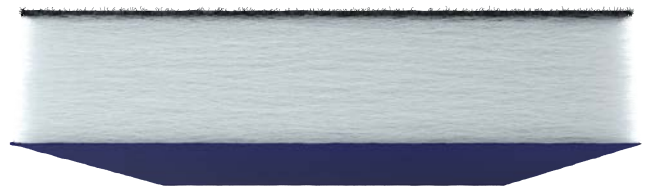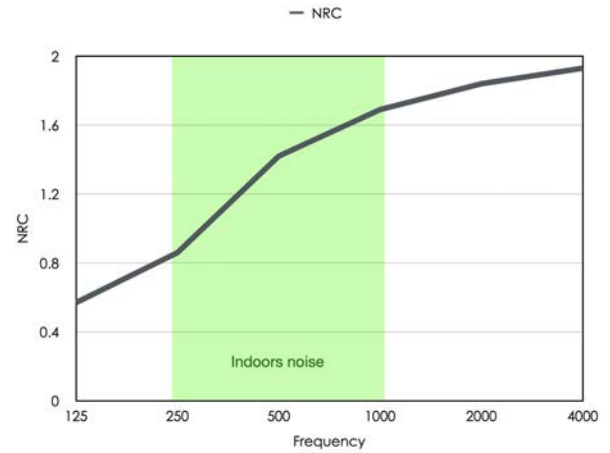

Product Dimensions

Panel height	12"
Aircraft cable lenght	8' adjustable (10' on request)
Panel Thickness	2"
Options	Contact us for custom size

Compliance for points on Certifications

Up to
21 PT



Up to
4 PT



Product Dimensions

OPAL



UGR



TIBI MT



GEM 2

